

UP Stand Movable LiFePO4 Lithium Battery Pack

LPUS48V200H
51.2V200Ah 10.24KWh
Energy Storage Solutions



LPUS Series Brief Introduce

LPUS Series UP Standing Movable lithium battery pack is a household energy storage solution that provides reliable and efficient power for homes. It features a high-capacity lithium-ion battery that stores renewable energy from solar panels or the grid, reducing energy consumption costs and ensuring constant power supply during emergencies. The battery's sleek and compact design allows for easy installation and maintenance. With its user-friendly interface, users can monitor their energy usage and optimize energy management. This product is ideal for homeowners who want to reduce their carbon footprint and gain greater control over their energy consumption while enjoying uninterrupted power supply. With the wheels it's move easily.

Long
Life

Lithium Iron
Phosphate


Deep
Cycle



Applications

- BTS Stations, Telecom System
- Internet data center(IDC)
- Solar Energy/Off-Grid System
- Access net work system
- UPS System, EPS System
- Terminal of FTTX
- Indoor distribution system

Dimensions & Weight

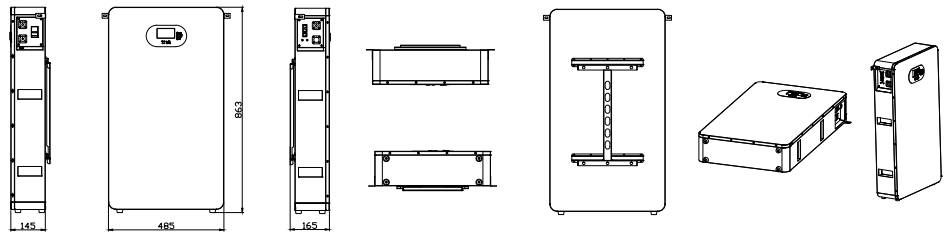

Length: $485 \pm 1\text{mm}$ Width: $145 \pm 1\text{mm}$ Height: $850+13 \pm 1\text{mm}$ | Weight: $92.0+0.1\text{kgs}$

Technical Specifications

Electrical Characteristics	Nominal Voltage	51.2V
	Nominal Capacity	200Ah
	Energy	10240Wh
	BMS with internal cell balancing	YES
	Cycle Life	≥ 6000 cycles @ 80%DOD
	Months Self Discharge	$< 3\%$
	Efficiency of Charge	100% @ 0.2C
	Efficiency of Discharge	96~99% @ 0.5C
Standard Charge	Charge Voltage	$57.6V \pm 0.2$
	Charge Mode	0.5C to 57.6V, then 57.6V, charge current to 0.02C(CC/CV)
	Charge Current	50A
	Max. Charge Current	100A
	Charge Cut-off Voltage	$57.6V \pm 0.2$
Standard Discharge	Continuous Current	50A
	Max continuous discharge current	100A
	Discharge Cut-off Voltage	$43.2V \pm 0.1$
Environmental	Charge Temperature	0 °C to 45 °C (32F to 113F) @ $60 \pm 25\%$ Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @ $60 \pm 25\%$ Relative Humidity
	Storage Temperature	0 °C to 40 °C (32F to 104F) @ $60 \pm 25\%$ Relative Humidity
	Water Dust Resistance	IP21
Mechanical	Cell & Method	Prismatic Cell, 16S2P
	Case	Iron
	Dimensions (in./mm.)	485*145*850mm/19.1*5.71*33.47Ins
	Weight (lbs./kg.)	Approx: 92kgs/202.8lbs
	Gravimetric specific energy	111.3WH/KG
	Protocol (optional)	ModBus: CAN/RS485/RS232(OPT)
	SOC (optional)	LCD

Inverters Support Brands:

Durable Lithium Battery use CSSUN

Copyright© 2023 CSSUN Energy Co., LTD

UP Stand Movable LiFePO4 Lithium Battery Pack

LPUS48V200H
51.2V200Ah 10.24KWh
Energy Storage Solutions




BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Cell Voltage balance function
- Short detection function

Performance Characteristic (Data test from 16 Series Cell)


Different Rate Discharge Curve (25°C)

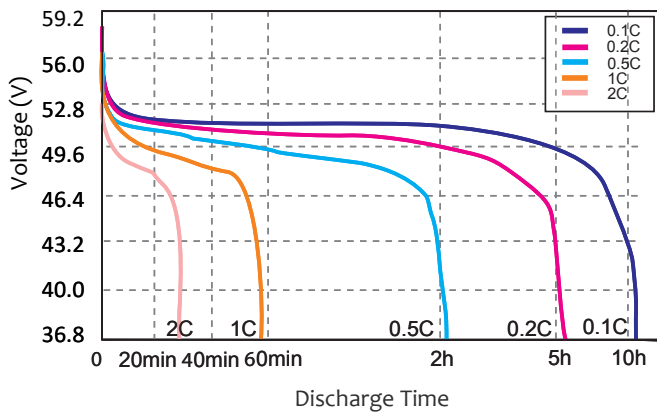


Different Temperature Discharge Curve At 0.5c

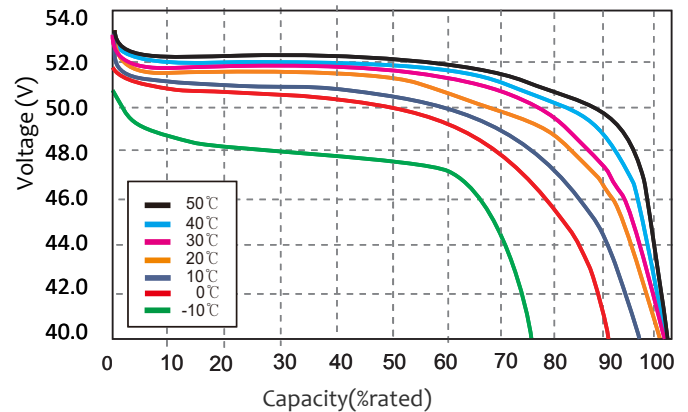


State Of Charge Curve At 0.5c (25°C)

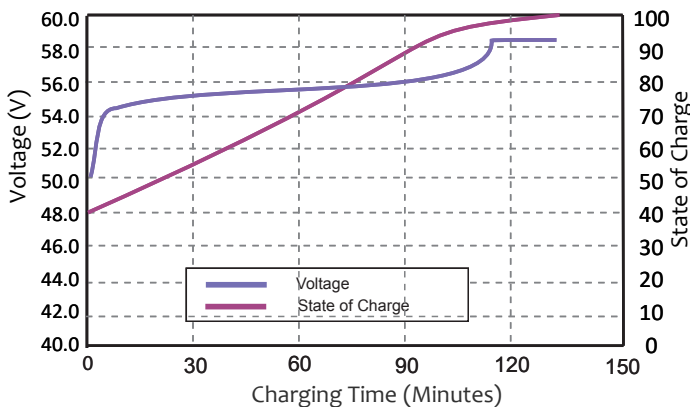


Charging Characteristics At 0.5c (25°C)

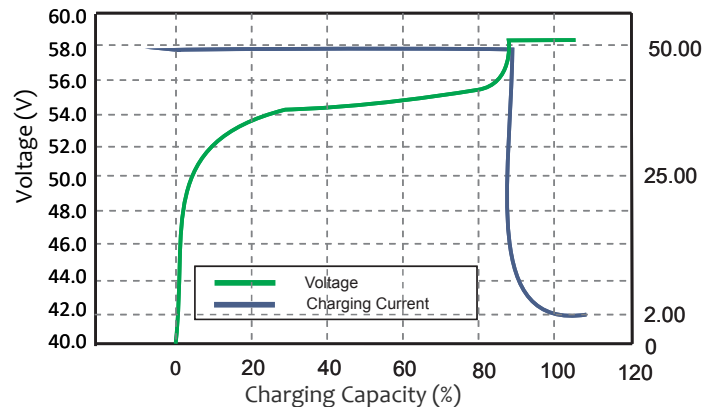

Cycle Life Curve At 0.2c According DoD

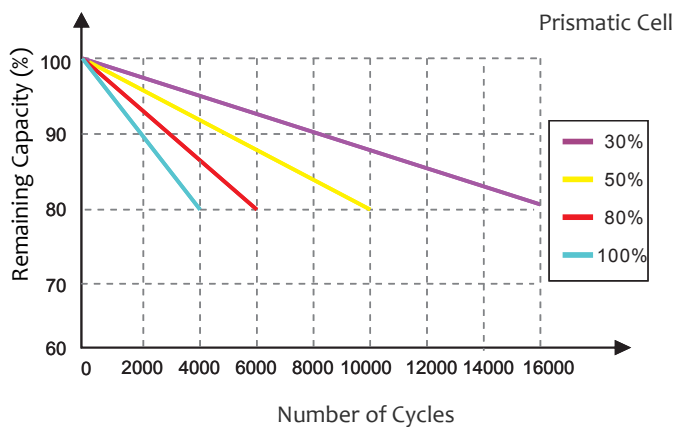

Self Discharge Characteristics Curve

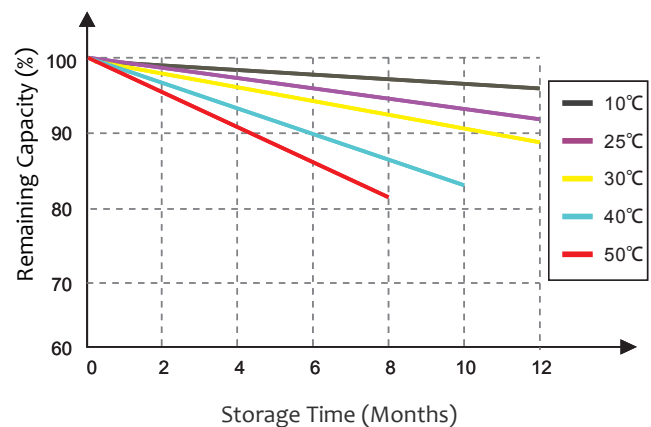

Note: All above information shall be changed without prior notice, CSSUN reserves the right to explain and update the latest information. Welcome inquiry us !
SAFETY WARNING : Use only within the allowed parameters. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. Do not use the battery if you suspect it may be faulty or damaged.

Add: Introduction Building, Xingdong Industry Park, Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-29123661 | email: sales@cssun.net | support@cssun.net | website: www.cssun.net