

Home Mobile Battery

LiFePO4 Lithium Battery Pack

LPUS DY Touch Color LCD
51.2V 280Ah/300Ah/314Ah
14.3kWh/15.36kWh16.0kWh
Energy Storage Solutions




LPUS Series Brief Introduce

LPUS Series Mobile UP Stand lithium battery pack is a household energy storage solution that provides reliable and efficient power for homes. It features a high-capacity lithium-ion battery that stores renewable energy from solar panels or the grid, reducing energy consumption costs and ensuring constant power supply during emergencies. The battery's sleek and compact design allows for easy installation and maintenance. With its user-friendly interface, users can monitor their energy usage and optimize energy management. This product is ideal for homeowners who want to reduce their carbon footprint and gain greater control over their energy consumption while enjoying uninterrupted power supply. With the wheels it's move easily.

Long
Life

Lithium Iron
Phosphate

Deep
Cycle

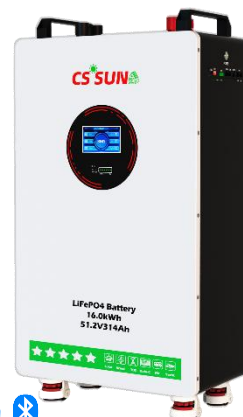

WiFi


Bluetooth



Applications

- BTS Stations, Telecom System
- Internet data center(IDC)
- Solar Energy/Off-Grid System
- Access net work system
- UPS System, EPS System
- Terminal of FTTX
- Indoor distribution system

Dimensions & Weight

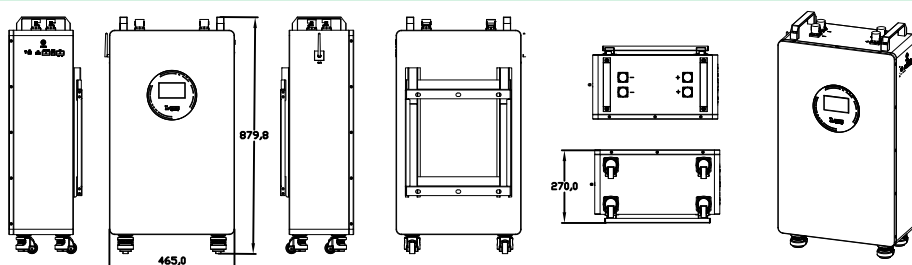

Length: 416±1mm

Width: 237±1mm

Height: 890±1mm

Weight: 117.0±0.5kgs

Technical Specifications

Electrical Characteristics	Model	LPUS48V280H-DY	LPUS48V300H-DY	LPUS48V314H-DY
	Nominal Voltage	51.2V		
	Nominal Capacity	280Ah	300Ah	314Ah
	Energy	14.3kWh	15.36kWh	16.0kWh
	BMS with internal cell balancing	YES		
	Cycle Life	> 6000cycles 80%DOD		> 8000cycles 80%DOD
	Months Self Discharge	<3%		
	Efficiency of Charge	100% @ 0.2C		
	Efficiency of Discharge	96~99% @ 0.5C		
Standard Charge	Charge Voltage	57.6V ± 0.2		
	Charge Mode	0.2C to 57.6V, then 57.6V, charge current to 0.02C (CC/CV)		
	Charge Current	100A		
	Max. Charge Current	200A		
	Charge Cut-off Voltage	57.6V ± 0.2		
Standard Discharge	Continuous Current	100A		
	Max continuous discharge current	200A		
	Discharge Cut-off Voltage	43.2V ± 0.1		
Environmental	Charge Temperature	0 °C to 45 °C (32F to 113F) @ 60 ± 25% Relative Humidity		
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @ 60 ± 25% Relative Humidity		
	Storage Temperature	0 °C to 40 °C (32F to 104F) @ 60 ± 25% Relative Humidity		
	Water Dust Resistance	IP21		
Mechanical	Cell & Method	Prismatic Cell 16S1P		
	Case	Iron		
	Dimensions (in./mm.)	465*272*883mm/18.31*10.71*34.77Ins		
	Weight (lbs./kg.)	Approx: 125kgs/275.54lbs		
	Gravimetric specific energy	114.69WH/KG	122.88WH/KG	128.61WH/KG
	Protocol	ModBus: CAN/RS485/RS232		
	Display / Operation	4.3' Color Touch LCD		

Inverters Support Brands:

GROWATT

SOLIS

PYLONTECH

MEGAREVO

STUDER

VOLTRONIC POWER

MUST 美世乐

VICTRON ENERGY

GOODWE

SACOLAR

KSTAR 科士达

INVT 英威腾

SCHNEIDER

DEYE 德业

YANG 阳光储能

SOFAR SOLAR

LU POWER TEK

FOX ESS

SMA

SRNE

Power Your Home * Choose CSSUN

Copyright© 2025 CSSUN Energy Co., LTD

Home Mobile Battery

LiFePO4 Lithium Battery Pack

LPUS DY Touch Color LCD
51.2V 280Ah/300Ah/314Ah
14.3kWh/15.36kWh16.0kWh
Energy Storage Solutions




BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Cell Voltage balance function
- Short detection function

Performance Characteristic (Data test from 16 Series Cell)


Different Rate Discharge Curve (25°C)

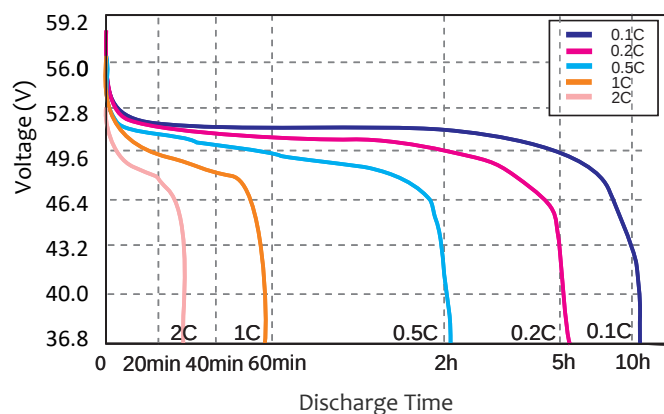


Different Temperature Discharge Curve At 0.5c

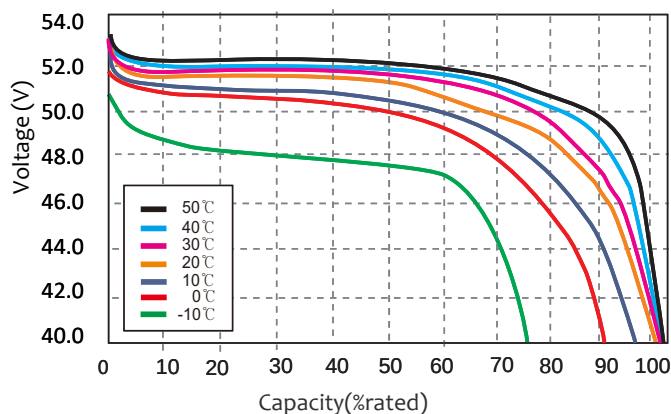


State Of Charge Curve At 0.5c (25°C)

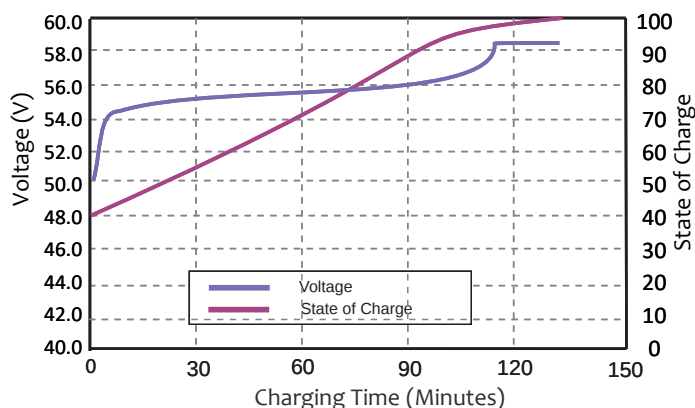


Charging Characteristics At 0.5c (25°C)

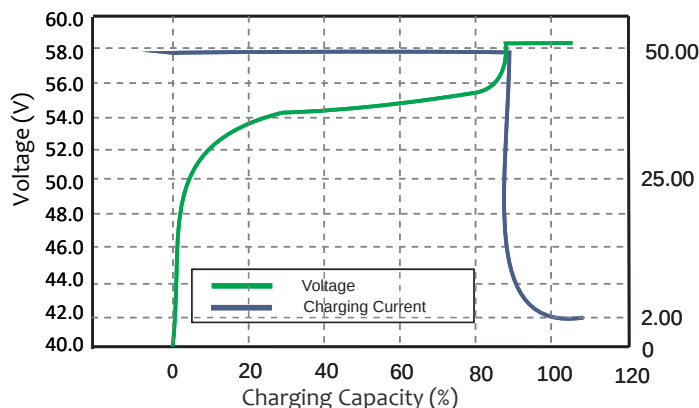

Cycle Life Curve At 0.5c According DoD

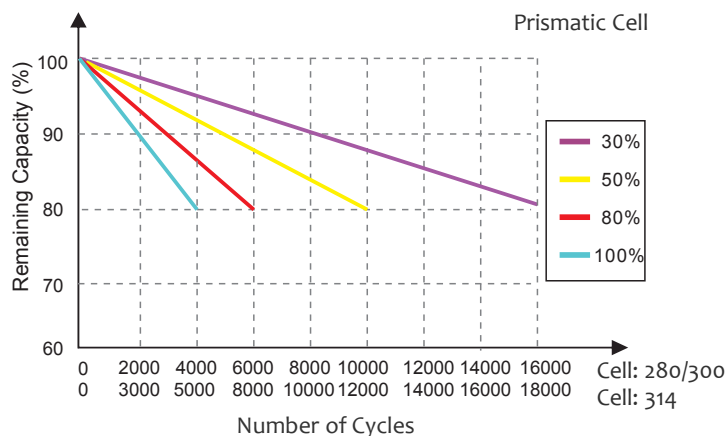

Self Discharge Characteristics Curve

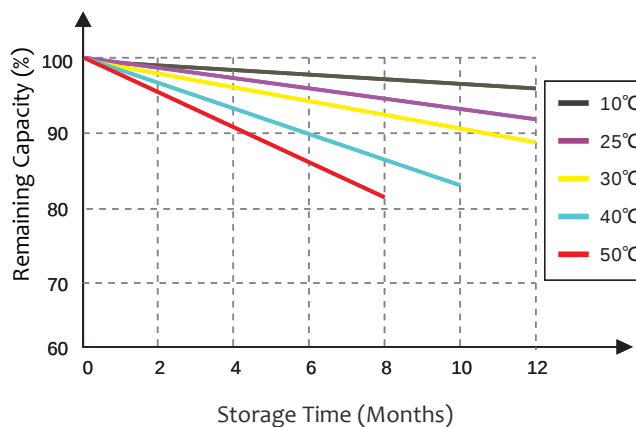

Note: All above information shall be changed without prior notice, CSSUN reserves the right to explain and update the latest information. Welcome inquiry us !
SAFETY WARNING : Use only within the allowed parameters. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. Do not use the battery if you suspect it may be faulty or damaged.

Add: Introduction Building, Xingdong Industry Park, Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-29123661 | email: sales@cssun.net | support@cssun.net | website: www.cssun.net